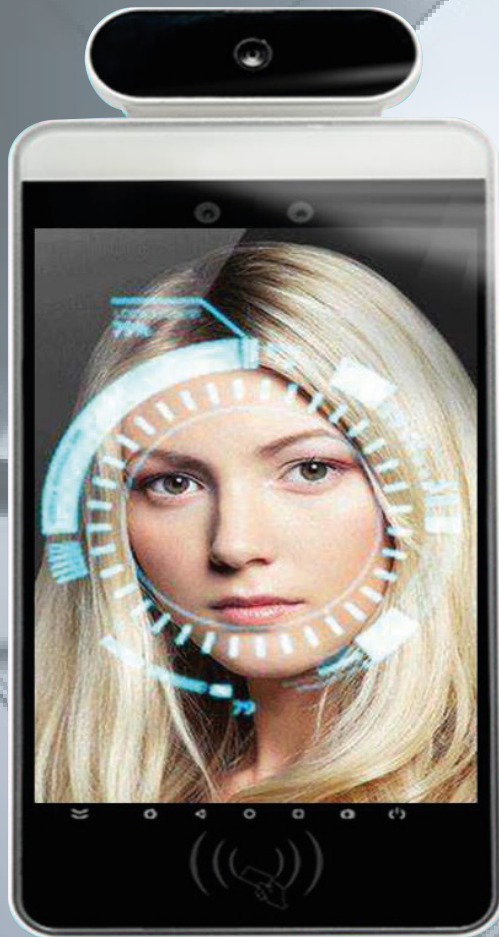






Pantalla táctil de 8"  
IP64 a prueba de agua,  
Soporte cableado  
Wireless (2.4G Wi-Fi)  
Termómetro Infrarojo  
Rango de error: 0.3°C

## HEC08T

Adecuado para áreas de oficinas, hoteles, puertas de acceso, edificios de oficinas, escuelas, centros comerciales, tiendas, comunidades, servicios públicos y proyectos de gestión y otros lugares donde se requiere control de acceso frontal.

**E**  
**E-CONTROL**

# Especificaciones

| RA08T 8 inch Dynamic Facial Recognition |                                                                                     | Accessories                    |                                                                                      |
|-----------------------------------------|-------------------------------------------------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------|
| Screen                                  |                                                                                     | Filling Light                  | LED filling light                                                                    |
| Dimension                               | 8 inch Touch Screen, full view angle, IPS LCD screen                                | Card Reader (Optional)         | Ic card reader                                                                       |
| Resolution                              | 1280×800                                                                            | Network Module                 | Support wired, wireless (2.4G Wi-Fi)                                                 |
| Camera                                  |                                                                                     | Interface                      |                                                                                      |
| Dual Camera                             | 2.0M (RGB Camera); 1.3M (Infrared Camera)                                           | Serial Communication Interface | RS232                                                                                |
| Type                                    | Wide dynamic camera                                                                 | Relay Output                   | NC,N0 and COM                                                                        |
| Aperture                                | 4mm                                                                                 | Wiegand Interface              | Support Wiegand 26/34 input /output                                                  |
| Focal Length                            | 0-2m                                                                                | Reset Interface                | Yes                                                                                  |
| White Balance                           | Automatic                                                                           | Interface                      | USB2.0 RJ45                                                                          |
| Wide Dynamic                            | Automatic                                                                           | Optional                       | EU COVID Certificate Green Pass, PDF417, QR Code, HDMI, HID,Health Code, 4G, Printer |
| Vertical Wide Angle                     |    | Function                       |                                                                                      |
|                                         |                                                                                     | Face Detection                 | 20,000 Capacity Support detecting and tracking 5 people at the same time             |
|                                         |                                                                                     | 1:N Face Recognition           | 99.99%                                                                               |
|                                         |                                                                                     | Stranger Detection             | Support                                                                              |
|                                         |                                                                                     | Remote Upgrade of Equipment    | Support                                                                              |
|                                         |                                                                                     | Recognize Distance             | Support (0.5-4 meters)                                                               |
| Horizontal Angle                        |  | Protection Level               | IP64                                                                                 |
|                                         |                                                                                     | General Parameters             |                                                                                      |
|                                         |                                                                                     | Power Supply                   | DC12V (±10%)                                                                         |
|                                         |                                                                                     | Operating Temperature          | -10 ° C ~ 60 ° C                                                                     |
|                                         |                                                                                     | Working Humidity               | 10% to 90%                                                                           |
|                                         |                                                                                     | Power Consumption              | 10W MAX                                                                              |
| Core Parameter                          |                                                                                     | Installation Method            | Turnstile, Wall mounted, Desktop, Floor Type                                         |
| CPU                                     | 4 cores, 1.8GHz, Android 7                                                          | Device Size                    | 234(L)*125(W)*24.5(H)mm                                                              |
| Memory                                  | 2GB RAM, 8GB ROM                                                                    | Weight                         | 3KG(Device Only)                                                                     |

# Instalación



Pillar Stand



Desktop



Wall-mounted



Floor Stand Type

\* Imágenes referenciales.

\*\* Las características pueden variar por disposición del fabricante.

