# Intelligent Edge Computing Server

## ECS-50@A1(-HD) Series



### **Key Features**

UNV


- Supports video stream based face detection and face comparison, monitoring with 100,000 face images.
- Supports video stream based behavior analysis, and provides no helmet detection, no chef hat detection, no work clothes
  detection, smoking detection, smoke and fire detection, calling detection, no mask detection, and rat detection.
- Can connect 4/8-channel Onvif or RTSP compliant third-party IP cameras.
- Two 10M/100M/1000M network interfaces (RJ45).
- Supports browser-based access and control.
- Supports custom RESTful API and reporting real-time data to a specified server.


### Specifications

Model		ECS-5004@A1	ECS-5004@A1-HD	ECS-5008@A1	ECS-5008@A1-HD	
IP video input		4-ch		8-ch		
Decoding capability		4 x 8MP@30 (1080P is recommended)		8 x 8MP@30 (1080P is recommended)		
Incoming bandwidth		64Mbps				
Outgoing bandwidth		64Mbps				
Smart	Video stream based face detection	4-ch		8-ch		
	Face library capacity	128 face libraries, total 100,000 face images				

UNV				D	ATASHEET		
	Video stream based	4-ch (cannot be enabled simultaneously with face recognition)		8-ch (cannot be enabled simultaneously with face			
	behavior analysis			recognition)			
	Behavior analysis type		lo helmet detection, no chef hat detection, no work clothes detection, smoking detection, smoke and re detection, calling detection, no mask detection, and rat detection.				
	Snapshot storage	Max 50,000 records					
Hard Disk		NA	Including 2.5" 1TB	NA	Including 2.5" 1TB		
			HDD		HDD		
External interface	Network interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet interfaces					
	USB interface	2 x USB3.0					
	Serial interface	1 x RS485 (phoenix connector)					
	Alarm in	2-ch					
	Alarm out	1-ch					
General		12V/3A	12V/3A	12V/3A	12V/3A		
	Power supply	Power Consumption:	Power Consumption:	Power Consumption:	Power Consumption:		
		≤24 W (without HDD)	≤36 W (with HDD)	≤24 W (without HDD)	≤36 W (with HDD)		
	Working Environment	-20°C ~ + 60°C (-4°F ~ +140°F), Humidity ≤ 95% RH (non-condensing)					
	Weight	≤1kg (2.20lb)	≤1.15kg (2.54lb)	≤1kg (2.20lb)	≤1.15kg (2.54lb)		
		(without HDD)	(with HDD)	(without HDD)	(with HDD)		
	Dimensions	181.0mm(W) × 150.0mm(D) ×36.0mm(H)					


## Dimensions

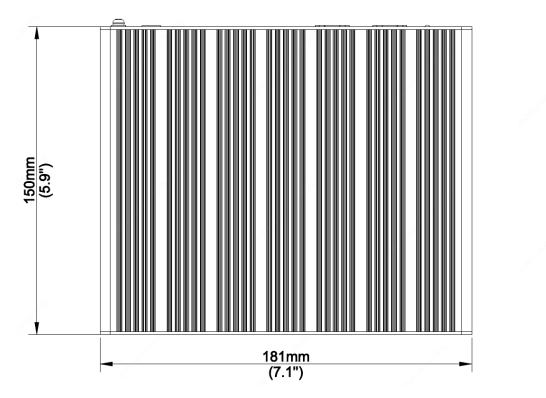

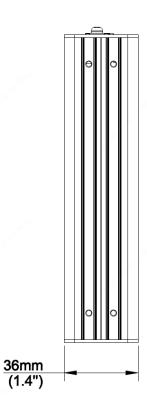



#### **Rear Panel**

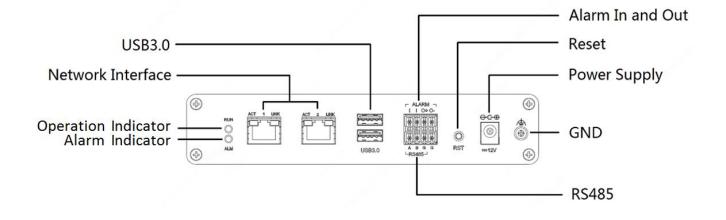

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://sgcdn.uniview.com

©2021 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\* Product specifications and availability are subject to change without notice.